# Opus 120/200

Open 120 is an elegant cylindrical shaped light fitting. Its timeless design is suitable for wall or celing installation, both indoors and outdoord. Opus 120 is available with a matt opal or clear glass shade.

| | |
|---|---|
| EAN / GTIN | 7312907244306 |
| E-number | 7530840 |
| Article no. | 7244-510-10 |
| Type designation | 52760 |
| Norwegian El-number | 3032253 |
| Finnish S-number | 4112866 |

**Specification**

| | |
|---|---|
| Material | Porcelain |
| Base colour | White (NCS S 1000-N) |
| Glass | Clear glass |
| Glass thread (mm) | 99 mm |
| Glass gasket | Silicone |
| Weight | 1,4 kg |
| Diameter (mm) | 116 |
| Height (mm) | 204 |
| Lamp holder | E27 |
| Light source | E27, max 60W (not included) |
| Effect | Max 60W |
| Rated voltage | 230V |
| IP class | IP54 |
| Insulation class | II |
| D class | No |
| IK class | IK02 |
| Ta | -30 - +25 |
| Installation | Ceiling/wall |
| CC measurement (mm) | 60-66, 70 |
| Knock out opening | 0 |
| Cable inlet | Bottom inlet |
| Cable glands | Bottom inlet |
| Cable area, max | Max 2 x 2,5 mm2 |
| Bridging | Yes |
| Surface mounted cable | No |
| Connection | Mantle screw |
| Family | Opus |
| Design | Duoform |

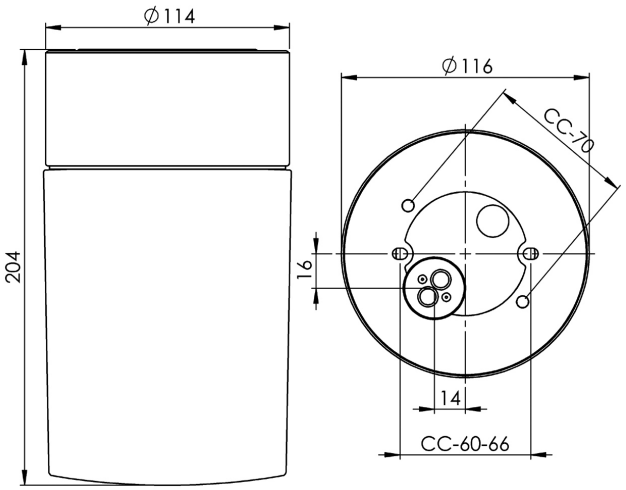


**Luminaire specific information**

The shade is mouth-blown, therefor they are all unique, minor variations may occur.

**Maintenance**

Disconnect the power to the luminaire. Unscrew the glass and clean it. Do not use detergents that contain solvents. Replace light source if necessary. Check the gasket and replace it if necessary. Screw the shade back on.

**Spare parts**

Shade Opus 120 clear glass, Article no.: 1-6184-10
Gasket silicone for thread 99 mm, Article no.: 03542

*If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).*