

# Ohm 140/170 LED DALI 3000K


A family of porcelain luminaires for walls, ceilings and tables. Designed by Kauppi & Kauppi, the soft curves and restrained silhouette references to both Scandinavian design and ancient Japanese tableware.

|                  |               |
|------------------|---------------|
| EAN / GTIN       | 7312908352949 |
| E-number         | 7512234       |
| Article no.      | 8352-8001-14  |
| Type designation | 51822/DALI    |



## Specification

|                       |                             |
|-----------------------|-----------------------------|
| Material              | Porcelain                   |
| Base colour           | Brown (NCS 7810-Y66R)       |
| Glass                 | Matt opal glass             |
| Glass thread (mm)     | 123,5 mm                    |
| Glass gasket          | Silicone                    |
| Weight                | 1,61 kg                     |
| Diameter (mm)         | 138                         |
| Height (mm)           | 167                         |
| Lamp holder           | LED                         |
| Light source          | LED module 10W              |
| Effect                | 10W                         |
| Lumen, light source   | 1200lm                      |
| Colour temperature    | 3000K                       |
| MacAdam               | 3 SDCM                      |
| Life span             | L80/B10: 50 000 h           |
| Ra                    | Min 90                      |
| Lighting control      | DALI Type 2                 |
| Rated voltage         | 230V                        |
| Dimmable              | DALI PHM126 min 3%          |
| IP class              | IP44                        |
| Insulation class      | I                           |
| Energy class          | E                           |
| D class               | No                          |
| IK class              | IK02                        |
| Ta                    | -30 - +25                   |
| Installation          | Ceiling/wall                |
| CC measurement (mm)   | 60-66, 70                   |
| Knock out opening     | 0                           |
| Cable inlet           | Bottom inlet                |
| Cable glands          | Bottom inlet                |
| Cable area, max       | Max 5 x 2,5 mm <sup>2</sup> |
| Bridging              | Yes                         |
| Surface mounted cable | No                          |
| Connection            | Terminal block              |
| Family                | Ohm                         |
| Design                | Kauppi & Kauppi             |

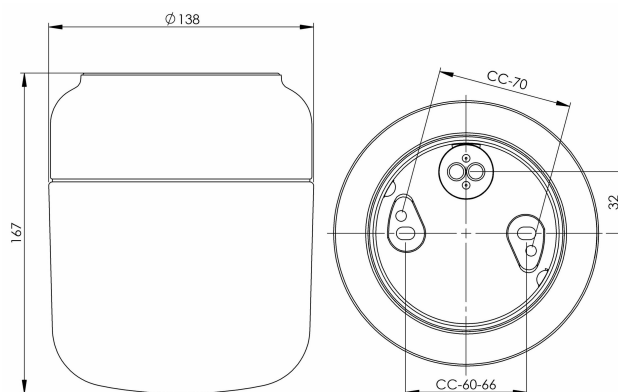

## Maintenance

Disconnect the power to the luminaire. Unscrew the glass and clean it. Do not use detergents that contain solvents. Replace light source if necessary. Check the gasket and replace it if necessary. Screw the shade back on.

## Spare parts

Shade Ohm 140/170 matt opal, Article no.: 1-6168-30  
Gasket silicone for thread 123,5 mm, Article no.: 02789  
LED module 10W DALI 3000K, Article no.: 1-54062-1930

*If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).*