# Cool

A smart and slick external downlight of ceramic in a timeless elegant design. Suitable both indoors and outdoors.

| | |
|---|---|
| EAN / GTIN | 7312907352124 |
| E-number | 7511287 |
| Article no. | 7352-400-12 |
| Type designation | 7352 |
| Norwegian El-number | 3032139 |
| Finnish S-number | 4212088 |

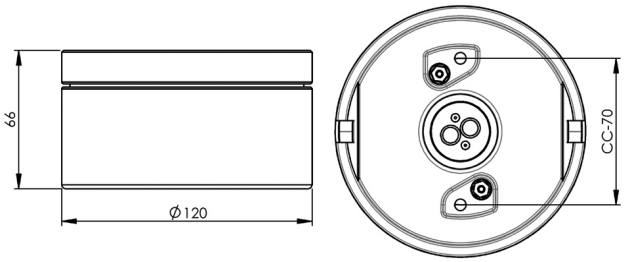


**Specification**

| | |
|---|---|
| Material | Porcelain |
| Base colour | Grey (NCS S 6005-G50Y) |
| Glass | Protection glass (Clear glass) |
| Glass thread (mm) | 99 mm |
| Glass gasket | Silicone |
| Weight | 1 kg |
| Diameter (mm) | 120 |
| Height (mm) | 66 |
| Lamp holder | GX53 |
| Light source | Max 9W (not included) |
| Effect | Max 9W |
| Rated voltage | 230V |
| IP class | IP44 |
| Insulation class | II |
| D class | No |
| IK class | IK03 |
| Ta | -30 - +25 |
| Installation | Ceiling/wall |
| CC measurement (mm) | 70 |
| Knock out opening | 2 |
| Cable inlet | Bottom inlet |
| Cable glands | Bottom inlet |
| Cable area, max | Max 3 x 1,5 mm2 |
| Bridging | Yes |
| Surface mounted cable | Yes |
| Connection | Screw connector |
| Family | Cool |
| Design | Håkan Svennesson SD |

**Luminaire specific information**

Maximum measurement for lightsource: Ø75 mm, height 24mm.

**Maintenance**

Switch off the power to the fixture. Remove the top and clean it. Do not use cleaning agents containing solvents. Change the light source if necessary. Check the gasket and change it if necessary. Replace the top.

**Spare parts**

Gasket silicone for thread 99 mm, Article no.: 03542

*If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).*